

## Geisha Dynasty Quilt

88" x 94"



*This pattern features  
Kona Bay Fabrics  
Geisha Dynasty  
Collection*

*Cut strips as indicated in  
chart then cut smaller  
pieces listed from these  
strips.*

*This pattern is not for resale,  
for personal use only.*

*\*Yardages listed are for  
regular cuts unless noted  
otherwise. If "Fussy  
Cutting" extra yardages  
will be needed, amounts  
will vary depending on  
motif selection and fabric  
repeats.*

**Backing-8 yards**  
**Batting-96" x 102"**

Fabric Name, Placement & Yardage	First Cuts	Next Cuts	Fabric Name, Placement & Yardage	First Cuts	Next Cuts	
<b>Fabric A-GEIS-16 Black</b> Geisha Block 4 Panels (about 48")	4	22½" x 20½"	<b>Fabric D-GEIS-22 Black</b> Small Triangles ⅞ yard	2 1	9⅞" x 42" 5** 8" x 42" 5**	9⅞" squares 8" squares
**cut squares once diagonally						
<b>Fabric B-GEIS-17 Black</b> Triangles, Block 2 Center & Chevron Border 1⅓ yards (2 yards if "Fussy Cutting")	1 12	11⅞" x 42" 2½" x 42"	3* 30 22	11⅞" squares 2½" x 10½" 2½" squares		
*cut squares once diagonally						
<b>Fabric C-GEIS-18 Black</b> GEIS-20 Red GEIS-21 Red GEIS-21 Blue Triangles, Block 2 Center & Chevron Border 1⅓ yards* for each of four fabrics ( 1⅞ yards if "Fussy Cutting")	1** 12**	11⅞" x 42" 2½" x 42"	3** 30** 22**	11⅞" squares 2½" x 10½" 2½" squares		
*Cut large squares once diagonally. **Cut for each of four fabrics						
<b>Fabric F-GEIS-23 Black</b> Sashing & Binding 2½ yards	34	2½" x 42"	12 12 8	2½" x 22½" 2½" x 20½" 2½" x 10½"		
<b>Fabric G-GEIS-23 Green</b> Block 2 Center & Chevron Border 1 yard	12	2½" x 42"	30 22	2½" x 10½" 2½" squares		
<b>Fabric H-GEIS-23 Red</b> Block 2 Center, Chevron Border & Sashing Corners 1⅞ yards	13	2½" x 42"	30 38	2½" x 10½" 2½" squares		


## Let's Begin

Before you begin read all instructions. Referring to project Cutting Chart, cut First Cuts strips as indicated in chart then cut smaller pieces listed under Next Cuts from these strips. Use an Accurate Seam Allowances and Assembly Line Method to construct this quilt. Use a  $\frac{1}{4}$ "-wide seam allowance throughout this project. Press seams in direction of arrows as indicated in each diagram.


## Making the Quilt

Some extra triangles are cut for placement options.

1. Arrange and sew together five assorted  $2\frac{1}{2}$ " Fabrics B, C, G, and H squares as shown. Press. Make thirty in assorted combinations.




2. Arrange six assorted units from step 1 as shown. Some rows will need to be rotated or repressed to allow seams to go in opposite direction from row to row. Press. Make five.

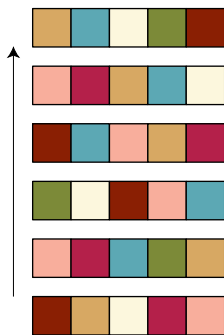


Make 5  
(in assorted combinations)  
Note: Rows will need to be rotated so seams go in opposite direction from row to row.

3. Sew two smaller Fabric D triangles to the top and bottom of unit from step 2 ( $10\frac{1}{2}$ " sides). Press seams toward triangles. Sew two larger Fabric D triangles to sides of unit ( $12\frac{1}{2}$ " sides). Press. Make five.

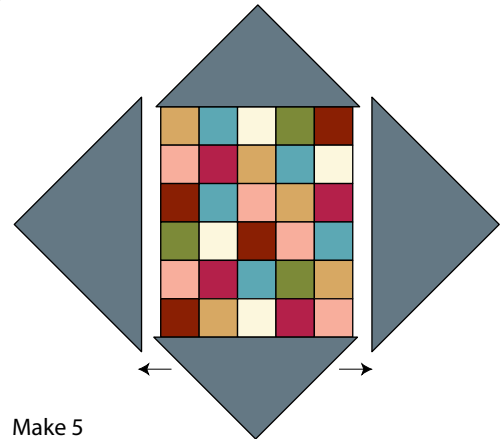

4. Sew four assorted Fabric B, C, and E triangles to unit from step 3 as shown. Press seams toward triangles. Unit is larger than needed center and trim unit to measure  $20\frac{1}{2}$ " x  $22\frac{1}{2}$ ". Make five. Note: Place the smallest Fabric D triangles on top and bottom before trimming.

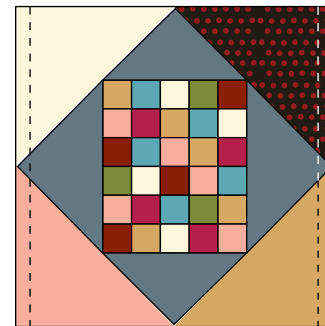


Make 5  
(in assorted combinations)  
Trim unit to measure  $20\frac{1}{2}$ " x  $22\frac{1}{2}$ "

5. Referring to layout, sew one unit from step 4 between two  $2\frac{1}{2}$ " x  $22\frac{1}{2}$ " Fabric F strips. Press seams toward Fabric F. Sew this unit between two  $22\frac{1}{2}$ " x  $20\frac{1}{2}$ " Fabric A pieces. Press. Make two.


6. Referring to layout, sew three units from step 4 to two  $2\frac{1}{2}$ " x  $22\frac{1}{2}$ " Fabric F strips. Press seams toward Fabric F.

7. Arrange and sew together three  $2\frac{1}{2}$ " x  $20\frac{1}{2}$ " Fabric F strips and two  $2\frac{1}{2}$ " Fabric H squares as shown. Press. Make four.

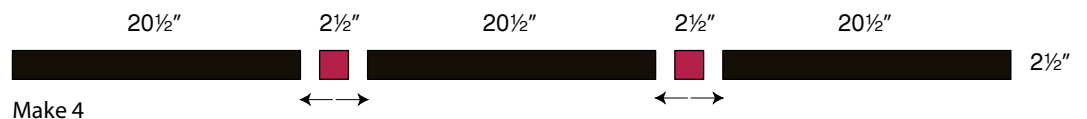


8. Referring to layout, arrange and sew together rows from steps 5, 6, and 7. Press.


9. Sew one 2½" Fabric B, C, G, or H square to one 2½" x 10½" Fabric B, C, F, G, or H strip as shown. Press. Sew a different 2½" x 10½" strip to unit. Press.

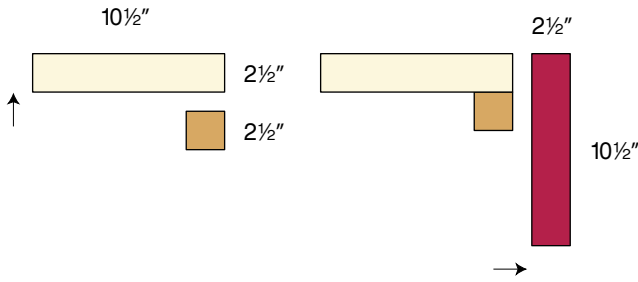

10. Continue sewing 2½" x 10½" Fabric B, C, F, G, and H strips to previous unit until it measures longer than top, bottom and sides of quilt.

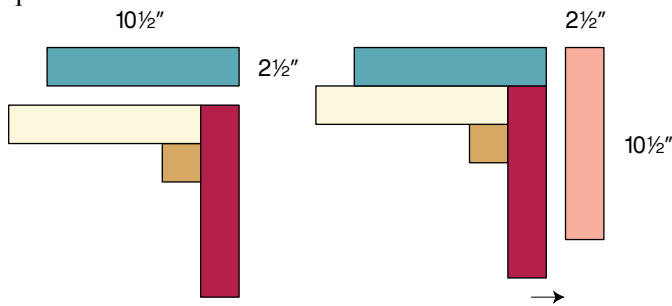


11. Measure quilt top through center from side to side. Cut two border units to 10½" by this measurement these will be sewn to top and bottom of unit (step 12). Measure quilt through center from top to bottom. Cut two border units to 10½" by this measurement these will be sewn to sides of quilt (step 16). Note: Our border units were cut 10½" x 64½" (top and bottom border) and 2½" x 74½" (side borders).

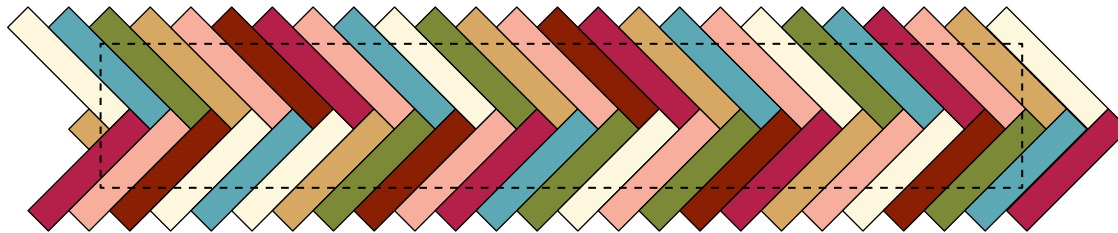


Make 4  
(assorted combinations)  
Sew enough strips together to be able to cut the following.  
Cut 2--10½" x 64½" for top and bottom borders  
Cut 2--10½" x 74½" for side borders

12. Sew shorter border units to top and bottom of quilt. Press.

13. Arrange and sew together three 2½" x 22½" Fabric F strips and two 2½" Fabric H squares as shown. Press. Make two. Referring to layout, sew one of these units to one longer border unit. Press. Make two. Do not sew these to quilt at this time.

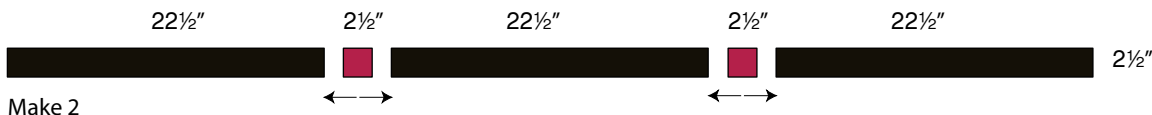

14. Sew two Fabric B, C, and E triangles together as shown. Press. Sew one 2½" x 10½" Fabric F strip to unit. Press seam toward Fabric F. Sew one 2½" Fabric H square to one 2½" x 10½" Fabric F strip. Press seams toward Fabric F. Sew both units from this step together as shown. Press. Make four.



15. Referring to layout, sew one long border unit from step 13 between two units from step 14, checking orientation of corner units prior to sewing. Press seams toward unit from step 14. Make two.

16. Referring to layout, sew quilt between units from step 15. Press.

### Finishing the Quilt

1. Cut backing fabric piece into three equal pieces. Sew pieces together to make one 96" x 120" approximate backing piece. Press and trim to backing to measure 96" x 102".

2. Press backing and quilt top trimming all excess threads. Layer and baste backing, batting, and quilt top together. Hand or machine quilt as desired. Bind quilt as desired.